

# DH-IPC-PT1439H-S-PV

4MP Smart Dual Light Active Deterrence Network PT Camera



- 1/2.8" 4Megapixel CMOS.
- Max. 25/30 fps@4MP.
- H.265 Encoding.
- Human/Vehicle Detection.
- Perimeter Protection.
- Active Deterrence.
- Smart Dual Light.
- Two-way Talk.
- Easy App Controls.



## Series Overview

With features of simple installation, easy operation, and high performance-cost ratio, Dahua Entry series network camera is applicable to small and medium-sized scenes, such as homes/residences, small-sized retail stores, and other small and medium-sized enterprises.

## Functions

### Smart Dual Light

Dahua Smart Dual Light technology adopts smart algorithm to detect targets. Usually, the IR illuminator is on at night; when the target appears in the monitoring area, the white light is on, and the camera records the full-color video and information of key events. That is, the camera links snapshot and video with full-color image. When the target is out of the monitoring area, the white light is off and the IR illuminator is on, which reduces light pollution efficiently.

### Siren and Light Active Deterrence

The camera supports the white light alarm and voice alarm when perimeter event occurs, to realize the deterrence and effective intervention. The camera is built in the alarm voice, and supports customized voice importing.

### Two-way Talk

With its built-in high-sensitivity microphone and high-power speaker, the camera realizes two-way talk through the mobile app.

### Human Detection

Dahua intelligent algorithms extract moving human targets from videos and filters out alarms that are triggered by non-human targets to increase the accuracy and effectiveness of alarms.

### Smart H.265+ & Smart H.264+

With advanced scene-adaptive rate control algorithm, Dahua smart encoding technology realizes the higher encoding efficiency than H.265 and H.264, provides high-quality video, and reduces the cost of storage and transmission.

### IVS

With advanced video algorithm, Dahua IVS technology supports intelligent functions, such as tripwire and intrusion.

Technical Specification					
Camera					
Image Sensor	1/2.8" CMOS				
Pixel	4 MP				
Max. Resolution	2560 (H) x 1440 (V)				
ROM	128 MB				
RAM	128 MB				
Electronic Shutter Speed	1 s–1/30,000 s				
Scanning System	Progressive				
Min. Illumination	0.05 lux@F1.6 (Color, 30 IRE); 0.005 lux@F1.6 (B/W, 30 IRE); 0 lux (Illuminator on);				
Illumination Distance	2.8 mm: 30 m (98.43 ft) (IR + warm light-only warm light is enabled) 30 m (98.43 ft) (IR + warm light-only IR is enabled)				
Illuminator On/Off Control	Manual; auto; off				
Illuminator Number	2 (IR + warm light)				
Lens					
Focal Length	2.8 mm				
Max. Aperture	F1.6				
Field of View	2.8 mm: H: 94°; V: 51°; D: 110°				
Close Focus Distance	2.8 mm: 1.2 m (3.93 ft)				
Iris Control	Fixed				
	Lens	Detect	Observe	Recognize	Identify
	2.8 mm	56.0 m (183.73 ft)	22.4 m (73.49 ft)	11.2 m (36.75 ft)	5.6 m (18.37 ft)
DORI Distance	*DORI (Detect, Observe, Recognize, Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances. For intelligent function distances, refer to installation and commissioning manual/project design tool.				
PTZ					
Pan/Tilt Range	Pan: 0° to 345°; Tilt: 0° to +90°				
Manual Control Speed	Pan: 0.1°–37.66°/s; Tilt: 0.1°–32.61°/s				
Preset Speed	Pan: 0.1°–37.19°/s; Tilt: 0.1°–30.82°/s				
Preset	50				
Power-off Memory	Yes				
Idle Motion	Preset; home position (only supports setting on DMSS)				
PTZ Locked	YES				
Smart Event					
IVS	Yes				
Human Detection	Yes				
Vehicle Detection	Yes				
Active Deterrence					
Light Warning	Warm light warning; Flash duration: 5 s–30 s; Flash frequency: high, medium, low				
Sound Warning	supports importing custom voice content; Sound can be set from 0%–100%. Play times can be set from 1–10.				
Video					
Video Compression	Smart H.265+; H.265; Smart H.264+; H.264B; H.264M; H.264H; MJPEG (Sub Stream 1)				
Streaming Capability	2 streams				
Resolution	4M (2560 x 1440); 1080p (1920 x 1080); 720p (1280 x 720); 640 x 360 (640 x 360); QVGA (320 x 240)				
Video Frame Rate	Main stream: 4M/1080p/720p/640 x 360@ (1–25/30 fps) Sub stream 1: 640 x 360/QVGA@ (1–25/30 fps)				
Bit Rate Control	CBR/VBR				
Video Bit Rate	H264: 16 kbps–8,192 kbps H265: 6 kbps–8,192 kbps				
Day/Night	Auto (ICR); Color/B/W				
BLC	Yes				
WDR	120 dB				
HLC	Yes				
White Balance	Auto; indoor; outdoor; tracking; manual; sodium lamp; natural light; street lamp				
Gain Control	Auto; manual				
Noise Reduction	2D NR; 3D NR				
Motion Detection	Yes				
Region of Interest (RoI)	Yes				
Defog	Electronic				
Image Rotation	180°				
Privacy Masking	4 area				
S/N Ratio	≥55 dB				
Audio					
Audio Compression	PCM; G.711A; G.711Mu; G.726				
Built-in MIC	Yes				
Built-in Speaker	Yes				
Network					
Network Port	RJ-45 (10/100 Base-T)				
Network Protocol	HTTP; HTTPS; TCP/IP; IPv4; RTSP; UDP; DHCP; DNS; DDNS; IPv6; SSL; ARP; RTCP; RTP; IP Filter				
Interoperability	CGI; SDK; ONVIF (Profile S & Profile T)				
Streaming Method	Unicast/Multicast				
User/Host	20 (total bandwidth: 64 M)				
Storage	Micro SD card (Supports max 256 GB)				

# Entry Series | DH-IPC-PT1439H-S-PV

Browser	IE: IE 7 and later versions; Chrome; Firefox; Safari
Management Software	Smart PSS;DMSS;Player;ConfigTool;NVR;Smart Player
Mobile Client	iOS;Android
<b>Function</b>	
Abnormal Sound Alarm	Yes
<b>Certification</b>	
Certifications	EN 62368-1;EN 55032;EN 61000-3-3;EN IEC 61000-3-2;EN 50130-4;EN 55035;
<b>Port</b>	
Audio Input	1 channel (built-in mic)
Audio Output	1 channel (built-in speaker)
Alarm Linkage	Capture; preset; recording; audio; sending email
Alarm Event	Motion/Tampering detection; audio detection; network disconnection detection; IP conflict detection;
<b>Power</b>	
Power Supply	12 VDC, 1.0 A ± 10% PoE (802.3af)
Power Consumption	12 VDC, 1.0 A ± 10%: Basic: 3 W; Max: 11 W (illuminator+speaker+PTZ operation) PoE ( 802.3af ) Basic: 4 W; Max: 12 W (illuminator+speaker+PTZ operation)
Power Adapter	Optional
<b>Environment</b>	
Operating Temperature	-30 °C to +55 °C (-22 °F to +131 °F)
Operating Humidity	≤95%
Protection	IP66;TVS 2000 V lightning proof; surge protection; voltage transient protection
<b>Structure</b>	
Product Dimensions	128.4 mm × Ø127.3 mm (5.06" × Ø5.01")
Net Weight	0.41 kg (0.9 lb)
Gross Weight	0.5 kg (1.1 lb)
<b>Filter</b>	
Remarks	* The precision of the presets for PTZ cameras might vary depending on different series. For scenes with high requirements on the precision, contact your local sales representative for assistance with selecting the model

## Accessories

Optional:



DH-PFM320D-EN  
DC12V2A power adapter




DH-PFM321-EN  
DC12V1A power adapter



PFM900-E  
Integrated Mount Tester

## Ceiling Mount

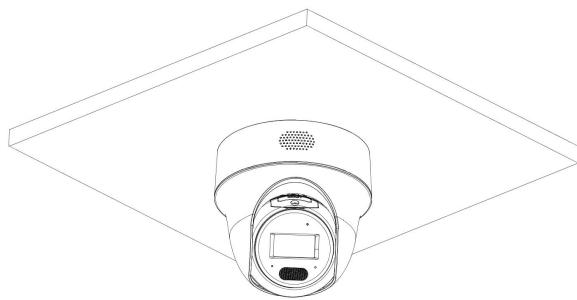

## Ordering Information

Type	Model	Description
IP CAMERA	DH-IPC-PT1439H-S-PV	4MP Smart Dual Light Active Deterrence Network PT Camera
Accessories (Optional)	DH-PFM321-EN	DC12V1A power adapter
	DH-PFM320D-EN	DC12V2A power adapter
	PFM900-E	Integrated Mount Tester

## Dimensions (mm[inch])

mm [inch]

